



APPROVAL SHEET

Product Name : Thin Film High Precision Chip Resistor
Part No. : TPR
Description : Size 0402~2512

For more contact information, please refer to our website: www.rideetech.com

Thin Film High Precision Chip Resistor — TPR Series

Applications

- Consumer electronics
- Computer
- Telecom
- Converter
- Printing equipment
- Measuring instrument



Features

- Tight Tolerance to $\pm 0.01\%$
- Low TCR down to $\pm 2 \text{ ppm}/^\circ\text{C}$
- Excellent long-term stability
- The variance of reliability test is reduced to $\pm 0.1\%$
- RoHS compliant
- Halogen free and lead free

Part Number Explanation

TPR	1206	B	10R0	T	15	S
Product Type	Size (Inch)	Tolerance	Resistance	Packaging	TCR (ppm/ $^\circ\text{C}$)	Functional
Thin Film High Precision Chip Resistor	0402 0603 0805 1206 1210 2010 2512	T : $\pm 0.01\%$ U : $\pm 0.02\%$ A : $\pm 0.05\%$ B : $\pm 0.10\%$ C : $\pm 0.25\%$ D : $\pm 0.50\%$ F : $\pm 1.00\%$	22R0 = 22Ω 100R = 100Ω 2201 = $2.2 \text{ K}\Omega$ 2202 = $22 \text{ K}\Omega$ 1003 = $100 \text{ K}\Omega$	T=Tape & Reel	02 : ± 2 03 : ± 3 05 : ± 5 10 : ± 10 15 : ± 15	S= Standard UT= Ultra TCR

Standard Electrical Specifications

Type	Power Rating @ 70°C	Max. RCWV	Max. Overload Voltage	Temperature Coefficient of Resistance (ppm/°C)	Resistance Tolerance (%)	Resistance Range	
						Min.	Max.
TPR0402	1/10W	50V	100V	±10 ±15	±0.01 ±0.02 ±0.05 ±0.10 ±0.25 ±0.50 ±1.00	10Ω	100KΩ
TPR0603	1/10W	75V	150V			4.7Ω	200KΩ
TPR0805	1/8W	150V	300V			4.7Ω	400KΩ
TPR1206	1/4W	200V	400V			4.7Ω	500KΩ
TPR1210	2/5W	200V	400V			10Ω	600KΩ
TPR2010	3/4W	200V	400V			10Ω	1MΩ
TPR2512	1W	200V	400V			10Ω	1.5MΩ

• Functional code: S

• Beyond the above specification also can meet the special requirements. For detail questions, please contact us freely.


Ultra TCR Electrical Specifications

Narrow TCR Type	Power Rating @ 70°C	Max. RCWV	Max. Overload Voltage	Temperature Coefficient of Resistance (ppm/°C)	Resistance Tolerance (%)	Resistance Range	
						Min.	Max.
TPR0402	1/10W	50V	100V	±5	±0.01 ±0.02 ±0.05 ±0.10 ±0.25 ±0.50 ±1.00	10Ω	10KΩ
TPR0603	1/10W	75V	150V			4.7Ω	50KΩ
TPR0805	1/8W	150V	300V			4.7Ω	100KΩ
TPR1206	1/4W	200V	400V			4.7Ω	150KΩ
TPR1210	2/5W	200V	400V			4.7Ω	150KΩ
TPR2010	3/4W	200V	400V			4.7Ω	360KΩ
TPR2512	1W	200V	400V			4.7Ω	600KΩ
TPR0402	1/10W	50V	100V	±3	±0.01 ±0.02 ±0.05 ±0.10 ±0.25 ±0.50 ±1.00	10Ω	8KΩ
TPR0603	1/10W	75V	150V			4.7Ω	40KΩ
TPR0805	1/8W	150V	300V			4.7Ω	80KΩ
TPR1206	1/4W	200V	400V			4.7Ω	120KΩ
TPR1210	2/5W	200V	400V			4.7Ω	150KΩ
TPR2010	3/4W	200V	400V			4.7Ω	360KΩ
TPR2512	1W	200V	400V			4.7Ω	600KΩ
TPR0402	1/10W	50V	100V	±2	±0.01 ±0.02 ±0.05 ±0.10 ±0.25 ±0.50 ±1.00	10Ω	8KΩ
TPR0603	1/10W	75V	150V			4.7Ω	40KΩ
TPR0805	1/8W	150V	300V			4.7Ω	80KΩ
TPR1206	1/4W	200V	400V			4.7Ω	120KΩ
TPR1210	2/5W	200V	400V			4.7Ω	150KΩ
TPR2010	3/4W	200V	400V			4.7Ω	360KΩ
TPR2512	1W	200V	400V			4.7Ω	600KΩ

• Functional code: UT

• Beyond the above specification also can meet the special requirements. For detail questions, please contact us freely.

■ Dimension

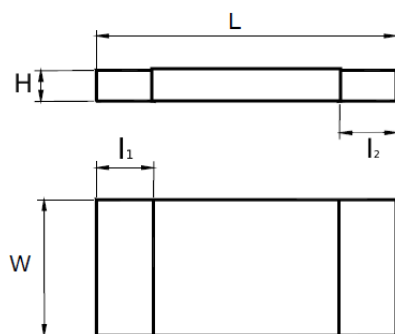


Unit: mm

TYPE	L	W	l ₁	l ₂	H
TPR0402	1.00 ± 0.05	0.50 ± 0.05	0.20 ± 0.10	0.25 ± 0.10	0.35 ± 0.05
TPR0603	1.55 ± 0.10	0.80 ± 0.10	0.25 ± 0.15	0.30 ± 0.15	0.45 ± 0.15
TPR0805	2.00 ± 0.10	1.25 ± 0.10	0.25 ± 0.20	0.40 ± 0.20	0.50 ± 0.15
TPR1206	3.10 ± 0.10	1.60 ± 0.10	0.45 ± 0.20	0.45 ± 0.20	0.60 ± 0.15
TPR1210	3.10 ± 0.10	2.60 ± 0.15	0.50 ± 0.20	0.50 ± 0.20	0.55 ± 0.10
TPR2010	5.00 ± 0.10	2.50 ± 0.15	0.60 ± 0.20	0.50 ± 0.20	0.55 ± 0.10
TPR2512	6.35 ± 0.10	3.20 ± 0.15	0.60 ± 0.20	0.50 ± 0.20	0.55 ± 0.10

■ Derating Curve

Operating Temperature Range: -55 to +155°C

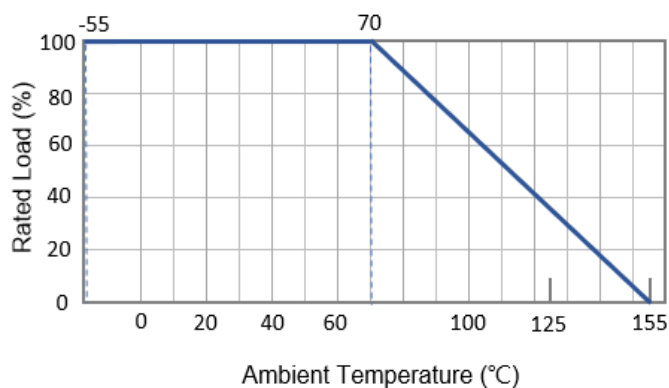

■ Voltage Rating or Current Rating

The direct or alternating voltage for the rated power can be calculated from the following formula but must not exceed the maximum voltage.

$$V = \sqrt{P \times R}$$

V=Rated Voltage(V)


P=Rated Power(W)

R=Rated Resistance(Ω)

■ Reliability Test and Requirement

Test Item	Test Method	Procedure	Requirements
Temperature Coefficient of Resistance (T.C.R)	JIS C 5202 5.2 IEC 60115-1 4.8.4.2	At 25 / -55°C and 25°C /+155°C, 25°C is the reference temperature $TCR (ppm/^{\circ}C) = (R_2 - R_1) / R_1 \times 1 / (T_2 - T_1) \times 10^6$	As Spec
Short Time Overload	JIS C 5202 5.5 IEC 60115-1 4.13	Ultra Power : 2.5 x Rated power for 5 seconds. Measure resistance after 30 minutes (0201 2 sec.)	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.2\% + 0.05\Omega)$
Resistance to Soldering Heat	JIS C 5202 6.4 IEC 60115-1 4.18	Solder dipping @ 260 $\pm$ 5°C for 10 seconds $\pm$ 1sec.	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.1\% + 0.05\Omega)$
Rapid Change of Temperature	JIS C 5202 7.4 IEC 60115-1 4.19	-55°C to +155°C ,5 cycles.	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.1\% + 0.05\Omega)$
Damp Heat	JIS C 5202 7.9 IEC 60115-1 4.24.2	40 $\pm$ 2°C with related humidity 90~95% D.C. rated voltage for 1.5 hours ON 30 minutes OFF. Cycle repeated 1000+48/-0 hours. After 1~4 hour, measure the resistance value.	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.5\% + 0.05\Omega)$
Load Life (Endurance)	JIS C 5202 7.10 IEC 60115-1 4.25.1	Permanent resistance change after 1000+48/-0 hours (1.5 hours ON, 0.5 hour OFF) at RCWV or Max. Keep the resistor at 70 $\pm$ 2°C ambient	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.5\% + 0.05\Omega)$
Bending Strength	IEC 60115-1 4.33	Resistance change after bended 3mm on the 90mm PCB	$\pm 1\%$ 、 $\pm 0.25\%$ 、 $\pm 0.5\%$ 、 $\pm 0.1\%$ 、 $\pm 0.05\%$: $\pm(0.1\% + 0.05\Omega)$


■ Packaging Information

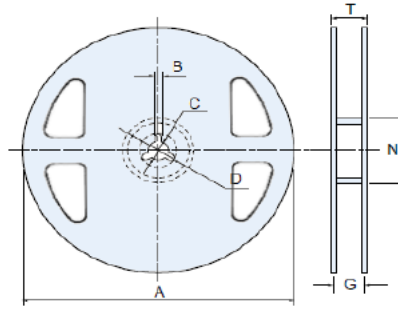

Unit:mm

Size	Type		A	N	C	D	B	G	T
0402	7"	10K/Reel	178±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	10.0±1.5	14.9 max
0603 / 0805 / 1206 / 1210	7"	5K/Reel	178±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	10.0±1.5	14.9 max
2010/2512	7"	4K/Reel	178±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	13.8±1.5	16.7 max.

■ Tapping Specification

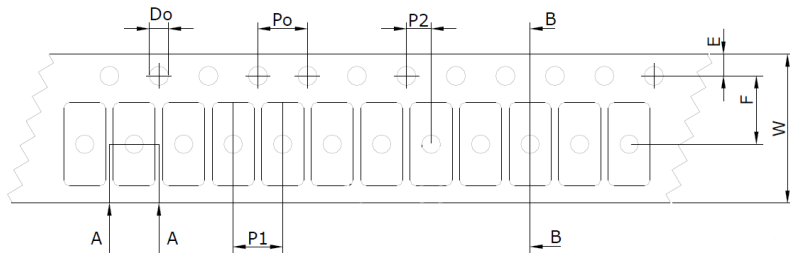

Unit:mm

Packaging	Size	A	B	W	E	F	P1	P2	D0	P0
Paper Type	0402	0.70±0.10	1.20±0.10	8.00±0.30	1.75±0.10	3.50±0.05	2.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10
	0603	1.10±0.20	1.90±0.20	8.00±0.30	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10
	0805	1.65±0.20	2.40±0.20	8.00±0.30	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10
	1206	2.00±0.20	3.60±0.20	8.00±0.30	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10
	1210	3.00±0.20	3.60±0.20	8.00±0.30	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10

Packaging	Size	A	B	W	E	F	P1	P2	D0	P0
Embossed Type	2010	2.80±0.20	5.50±0.20	12.00±0.30	1.75±0.10	5.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10
	2512	3.50±0.20	6.70±0.20	12.00±0.30	1.75±0.10	5.50±0.05	4.00±0.10	2.00±0.05	1.50+0.10/-0	4.00±0.10

■ Marking

■ E24 Series

0805, 1206, 1210, 2010, 2512: 4 digits marking

Resistance	47K
4 digits code	4702

0603: 3 digits marking

Resistance	47K
3 digits code	473

■ E96 Series

0805, 1206, 1210, 2010, 2512: 4 digits marking

Resistance	47.5K
4 digits code	472

0603: 3 digit included two numbers and one letter

Resistance	10.2K
3 digits code	02C

■ No marking code for 0402 size